
Flight Planning

Table of Contents

Frequent or Planned Destinations Record	5-3
Flight Planning – General	5-5
Takeoff Weight Determination	5-5
Maximum Allowable Landing Gross Weight Determination	5-8
Weight and Balance Determination	5-11
International Flight Planning	5-15
Frequently Used International Terms	5-15
International Operations Checklist	5-17
ICAO Flight Plan Form Completion – Items 7-19	5-23
FAA Flight Plan Form Completion Instructions	5-33
ICAO Weather Format	5-37
Sample TAF	5-39
Decoding TAFs	5-42
Sample METAR	5-44
Appendix A: Fuel Burn (No Tail Tank Fuel)	5-47
Appendix B: Fuel Burn (With Tail Tank Fuel, 6.8)	5-51
Appendix C: Fuel Burn (With Tail Tank Fuel, 6.7)	5-53

CAE SimuFlite

Frequent or Planned Destinations Record

Airport _____ Ident. _____
FBO _____ Freq. _____ Tel: () _____
Hotel _____ Tel: () _____
Catering _____ Tel: () _____
FSS _____ Tel: () _____

Airport _____ Ident. _____
FBO _____ Freq. _____ Tel: () _____
Hotel _____ Tel: () _____
Catering _____ Tel: () _____
FSS _____ Tel: () _____

Airport _____ Ident. _____
FBO _____ Freq. _____ Tel: () _____
Hotel _____ Tel: () _____
Catering _____ Tel: () _____
FSS _____ Tel: () _____

Notes _____

CAE SimuFlite

Airport _____ Ident. _____
FBO _____ Freq. _____ Tel: () _____
Hotel _____ Tel: () _____
Catering _____ Tel: () _____
FSS _____ Tel: () _____

Airport _____ Ident. _____
FBO _____ Freq. _____ Tel: () _____
Hotel _____ Tel: () _____
Catering _____ Tel: () _____
FSS _____ Tel: () _____

Airport _____ Ident. _____
FBO _____ Freq. _____ Tel: () _____
Hotel _____ Tel: () _____
Catering _____ Tel: () _____
FSS _____ Tel: () _____

Notes _____

Flight Planning – General

Takeoff Weight Determination


Use the AFM Performance section to determine the maximum takeoff weight allowed for a particular airport and its atmospheric conditions, passenger and cargo load, and fuel required.

The flow chart in **Figure 5-1** (page 5-6) illustrates the steps to consider when determining the maximum gross takeoff weight for a particular set of conditions.

The takeoff weight may be limited by the maximum certified takeoff weight, the takeoff field length, climb requirements, climb gradient, brake energy, or tire limit speed.


The takeoff profile appears in **Figure 5-2** (page 5-7).

Takeoff Weight Determination Procedure

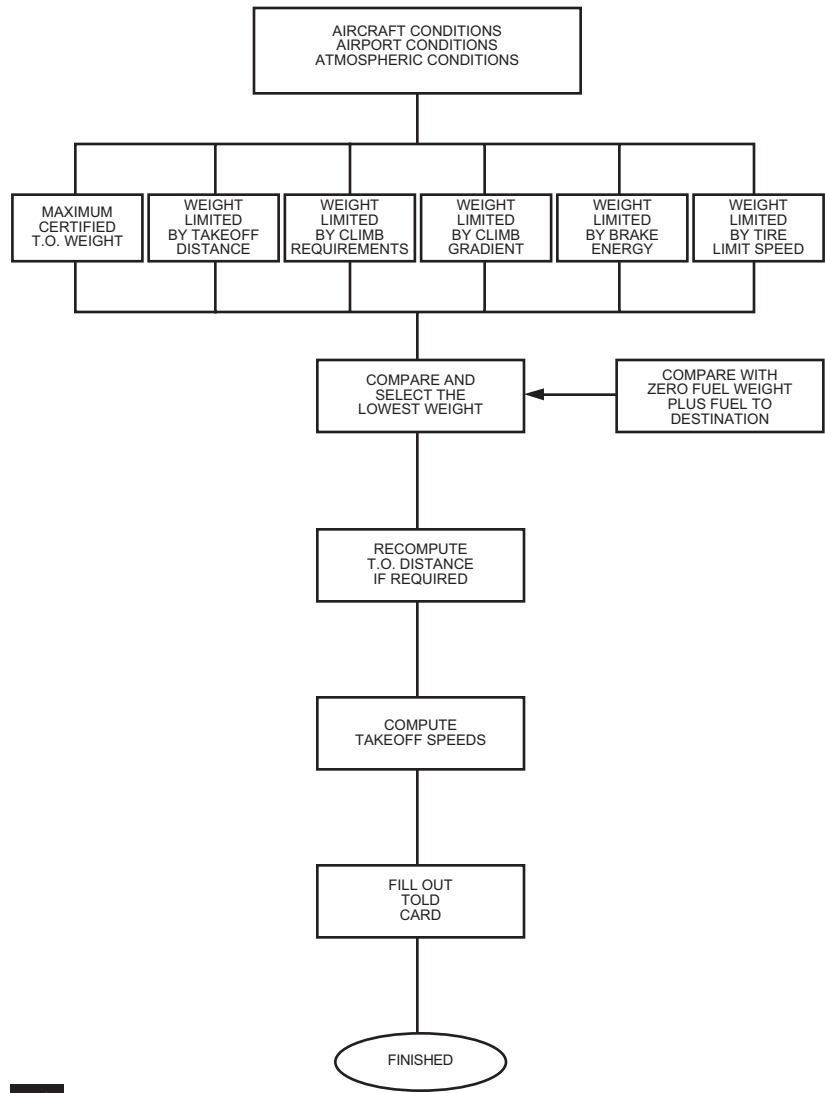

5-1

Minimum Climb/Obstacle Clearance One Engine Inoperative

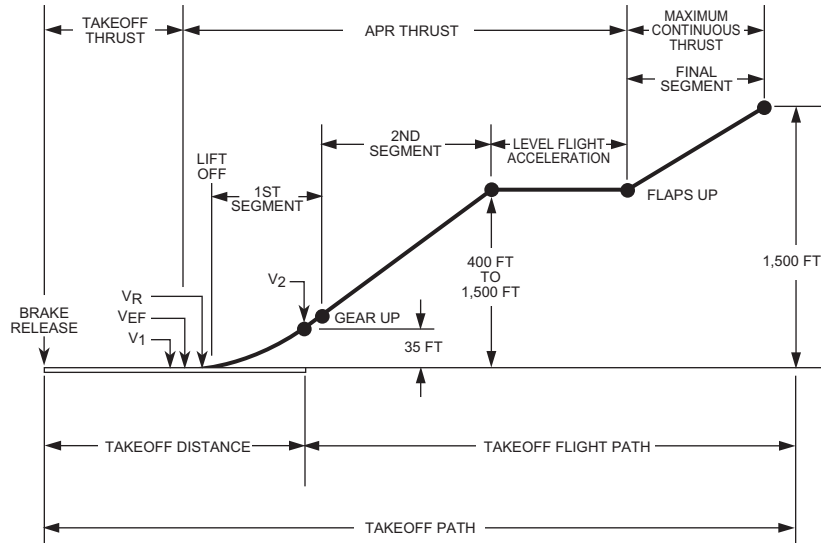

5-2


Maximum Allowable Landing Gross Weight Determination

The maximum landing weight allowed for a particular airport and its atmospheric conditions, the fuel required for alternate airport procedures (if required), or the fuel load on arrival at destination can be determined from the AFM's Performance section.

The flow chart in **Figure 5-4** (page 5-9) illustrates the steps to consider in determining the maximum allowable landing weight for a particular set of conditions.


The landing weight may be limited by the maximum certified landing weight, the landing field length, approach climb requirements, approach climb gradient, or landing climb gradient.

The landing profile (**Figure 5-3**) appears below.

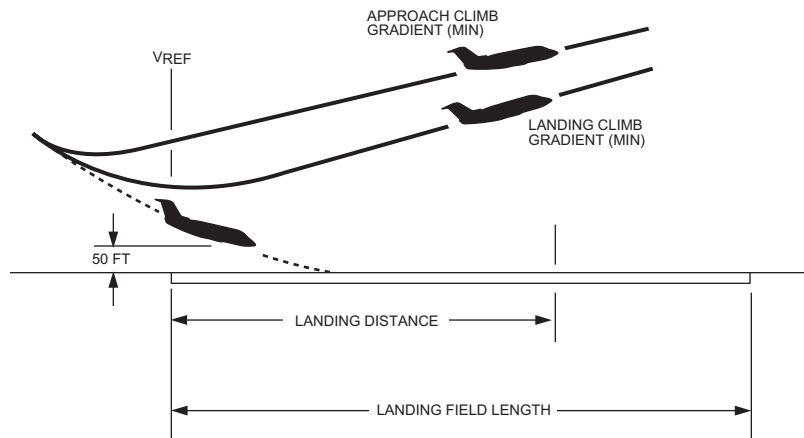

5-3

Landing Weight Determination Procedure

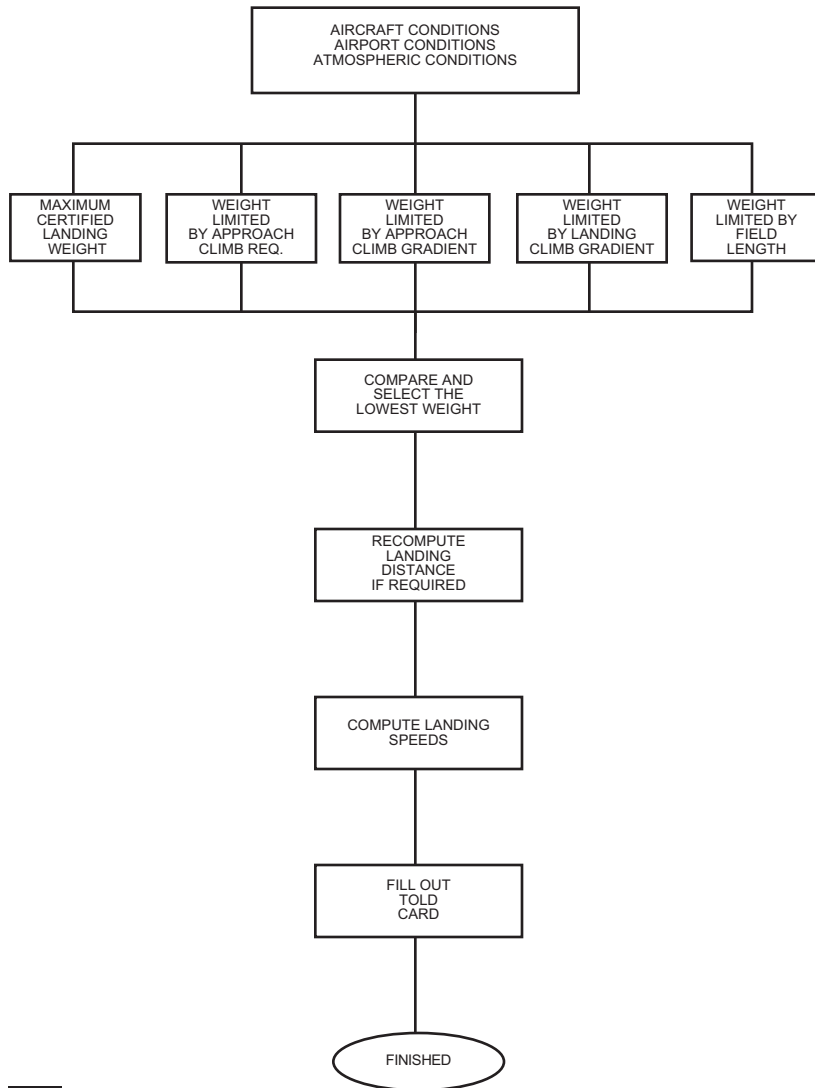

5-4

CAE SimuFlite

Aircraft Loading Schedule

	Weights X ARM = Moment/1,000			%MAC
Empty Weight				
Crew				
Galley Supplies				
Lavatory				
Crew Baggage				
Jump Seat				
Miscellaneous Storage				
Basic Operating Weight				
Catering				
Passengers	1			
	2			
	3			
	4			
	5			
	6			
	7			
	8			
	9			
	10			
Baggage Forward				
Baggage Aft				
Zero Fuel Weight Max – 31,000 lbs				
Fuel Load				
Main Wing Tanks Max – 9818 lbs				
Aux Tanks Max – 6868 lbs				
Tail Tank Max – 1276 lbs				
Ramp Weight Max –				
Less Taxi Fuel Max – 150 lbs				
Takeoff Weight Max –				
Less Enroute Burn –				
Landing Weight Max – 36,000 lbs				

Weight and Balance Determination

Using the aircraft loading schedule, follow the steps below to compute a takeoff loading weight and CG.

1. Obtain basic operating weight (or empty weight) and moment from aircraft weight and balance book (PSP 601-9 or PSP 601-9A).
2. Using the aircraft loading schedule, add all crew weights, galley and lavatory supplies, aircraft supplies, catering, passengers, cargo, and baggage to the basic operating weight (or empty weight) and moment. Determine the zero fuel weight and CG.
3. Check the zero fuel weight and CG to ensure it is within limits; use either the CG limits chart from the AFM Limitations section (**Figure 5-5**, page 5-13) or the AFM's tail tank supplement (if appropriate).
4. After determining the appropriate fuel load for the trip, add its weight and moment to the zero fuel weight and moment.
5. Figuring the weight of the fuel load depends on fuel density. The allowable fuel load limits by weight for each tank are in the AFM Limitations section. The maximum allowable weights for each tank are based upon pressure refueling, wings level, 1/2° nose-down attitude, and 6.8 lbs/US gallon fuel density.

The weight and moment of the fuel loaded into the aircraft can be taken from the weight and balance book (PSP 601-9 or PSP 601-9A). These loads are based on a fuel density of 6.7 lbs/US gallon.

For training purposes, the fuel load can be taken from Appendices A, B, or C (pages 5-47 through 5-53).

CAE SimuFlite

Add all the weights and moments to obtain the ramp weight and CG. Subtract the allowable taxi fuel and what remains is the takeoff weight and moment. The takeoff moment can be converted to percent MAC using the chart from the Weight and Balance manual (PSP 601-9 or PSP 601-9A).

6. Check the takeoff weight and moment to see that they are within limits using the flight envelope chart in the AFM Limitations section (**Figure 5-5**, page 5-13) or the AFM tail tank supplement (if applicable).


NOTE: Allow for forward CG travel during the initial 7% main tank fuel burn so that the CG does not move forward of limits. (This assumes a forward CG and either [1] full fuel in main and auxiliary tanks or [2] full main and auxiliary tanks with some fuel in the tail tank.)

7. Subtract the weight and moment of fuel consumed during the flight from the takeoff gross weight and moment to obtain the landing condition.

NOTE: During the trip and especially for training, verify that the weight and CG are within the allowable envelope by adding the fuel remaining in the tanks from the loading schedule to the zero fuel weight at takeoff.

Flight Envelope

Weight and Center of Gravity Limits

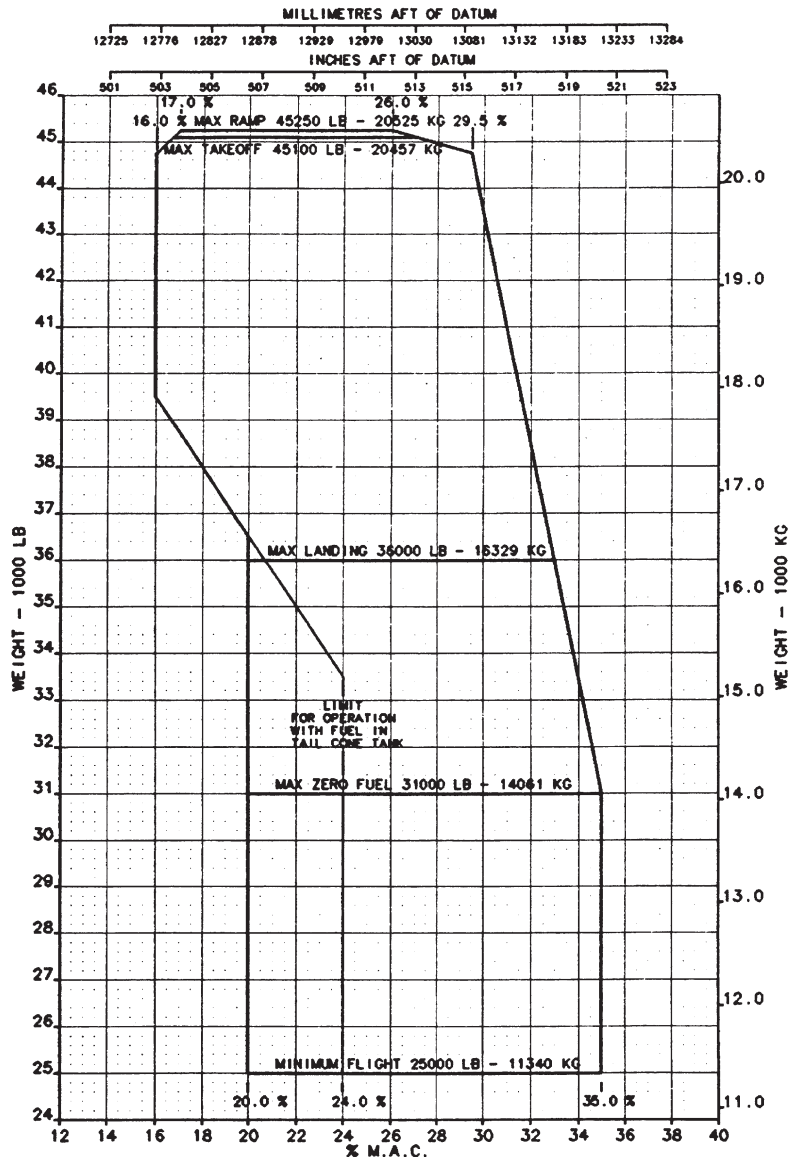

5-5

CAE SimuFlite

International Flight Planning Frequently Used International Terms

International Term	Explanation
ACC	Area Control Center
ADCUS	Advise Customs
AFIL	Air-Filed ICAO Flight Plan
ARINC	Aeronautical Radio Inc.
ATS	Air Traffic Services
BERNA	Swiss Radio Service
DEC	General Declaration (customs)
ETP	Equal Time Point (navigation)
FIC	Flight Information Center
FIR	Flight Information Region
GCA	Ground Controlled Approach
GEOMETER	A clear plastic attachment to a globe that aids in making surface measurements and determining points on the globe
IATA	International Air Traffic Association
ICAO	International Civil Aviation Organization
MET	See METAR
METAR	Routine Aviation Weather Reports
MNPS	Minimum Navigation Performance Specifications
NAT	North Atlantic

CAE SimuFlite

International Term	Explanation
NOPAC	North Pacific
OAG	Official Airline Guide
OKTA	Measure of cloud cover in eighths (five OKTAs constitute a ceiling)
OTS	Organized Track Structure
PPO	Prior Permission Only
PSR	Point of Safe Return (navigation)
QFE	Used in some nations; an altimeter setting that causes the altimeter to read zero feet when on the ground
QNE	Altimeter setting used at or above transition altitude (FL 180 in U.S.); this setting is always 29.92
QNH	Altimeter setting that causes altimeter to read field elevation on the ground
SITA	Societe Internationale de Telecommunications Aeronautiques; international organization provides global telecommunications network information to the air transport industry
SPECI	Aviation selected special WX reports
SSR	Secondary Surveillance Radar
TAF	Terminal Airdrome Forecast
UIR	Upper Information Region
UTA	Upper Control Area
WWV/WWVH	Time and frequency standard broadcast stations

International Operations Checklist

Aircrews are required to carry all appropriate FAA licenses and at least an FCC Restricted Radio Telephone Operations license. In addition, passport, visas, and an International Certificate of Vaccination are often required. The International Flight Information Manual (IFIM) specifies passport, inoculation and visa requirements for entry to each country.

The IFIM is a collection of data from Aeronautical Information Publications (AIP) published by the civil aviation authorities (CAA) of various countries.

The following detailed checklist should be helpful in establishing international operations requirements and procedures. You may want to use it to prepare your own customized checklist for your organization's planned destinations.

I. DOCUMENTATION

PERSONNEL, CREW

- Airman's certificates
- Physical
- Passport
- Extra photos
- Visa
- Tourist card
- Proof of citizenship (not driver's license)
- Immunization records
- Traveler's checks
- Credit cards
- Cash
- Passenger manifest (full name, passport no.)
- Trip itinerary
- International driver's license

CAE SimuFlite

AIRCRAFT

- Airworthiness certificate
- Registration
- Radio licenses
- MNPS certification
- Aircraft flight manual
- Maintenance records
- Certificates of insurance (U.S. military and foreign)
- Import papers (for aircraft of foreign manufacture)

II. OPERATIONS

PERMITS

- Flight authorization letter
- Overflights
- Landing
- Advance notice
- Export licenses (navigation equipment)
- Military
- Customs overflight
- Customs landing rights

SERVICES

Inspection

- Customs forms
- Immigrations
- Agricultural (disinfectant)

Ground

- Handling agents
- FBOs
- Fuel (credit cards, carnets)
- Maintenance

- Flyaway kit (spares)
- Fuel contamination check

Financial

- Credit cards
- Carnets
- Letters of credit
 - Banks
 - Servicing air carriers
 - Handling
 - Fuelers
- Traveler's checks
- Cash

COMMUNICATIONS

Equipment

- VHF
- UHF
- HF SSB
- Headphones
- Portables (ELTs, etc.)
- Spares

Agreements

- ARINC
- BERNA (Switzerland)
- SITA
- Stockholm

NAVIGATION

Equipment

- VOR
- DME

CAE SimuFlite

- ADF
- Inertial
- VLF/OMEGA
- LORAN
- GPS

Publications

- Onboard computer (update)
- En route charts (VFR, IFR)
- Plotting charts
- Approach charts (area, terminal)
- NAT message (current)
- Flight plans
- Blank flight plans

III. OTHER PUBLICATIONS

- Operations manual
- International Flight Information Manual
- Maintenance manuals
- Manufacturer's sources
- World Aviation Directory
- Interavia ABC
- Airports International Directory
- MNPS/NOPAC
- Customs Guide

IV. SURVIVAL EQUIPMENT

- Area survival kit (with text)
- Medical kit (with text)
- Emergency locator transmitter

- Floatation equipment
 - Raft
 - Life Jackets
- V. FACILITATION AIDS**
- U.S. Department of State
 - U.S. Department of Commerce
 - U.S. Customs Service
 - National Flight Data Center (FAA) Notams
 - FAA Office of International Aviation
 - FAA Aviation Security

VI. OTHER CONSIDERATIONS

- Pre-flight planner
- Aircraft locks
- Spare keys
- Security devices
- Commissary supplies
- Electrical adapters (razors, etc.)
- Ground transportation
- Hotel reservations
- NBAA International Feedback cards
- Catering
- WX service
- Reservations
- Slot times

ICAO International Flight Plan Form

AIR TRAFFIC SERVICES
SERVICES DE LA CIRCULATION AERIENNE

PRIORITY / PRIORITE **FF**

ADRESSE(S) / DESTINAIRE(S)

FLIGHT TIME / HEURE DE DEPART

ORIGINATOR / EXPEDITEUR

SPECIFIC IDENTIFICATION OF ADDRESSEE(S) AND/OR ORIGINATOR / IDENTIFICATION PRECISE DU/DES0 DESTINAIRE(S) ET/OU DE L'EXPEDITEUR

MESSAGE / TYPE DE MESSAGE

AIRCRAFT IDENTIFICATION / IDENTIFICATION DE L'AERONEF

FLIGHT RULES / REGLES DE VOL **8**

WAKE TURBULENCE CAT

EQUIPMENT / EQUIPEMENT **10**

DEPARTURE AERODROME / AERODROME DE DEPART

NUMBER / NOMBRE **9**

TYPE OF AIRCRAFT / TYPE D'AERONEF

TIME / HEURE

CRUISING SPEED

VITESSE CROISIERE **13**

LEVEL / NIVEAU

ROUTE / ROUTE **15**

DESTINATION AERODROME

AERODROME DE DESTINATION **16**

TOTAL EFT / DUREE TOTALE ESTIMEE

HR. MIN.

ALTN AERODROME

AERODROME DE DEGAGEMENT

2ND ALTN AERODROME

AERODROME DE DEGAGEMENT **18**

OTHER INFORMATION / RESEIGNEMENTS DIVERS

SUPPLEMENTARY INFORMATION (NOT TO BE TRANSMITTED IN FPL MESSAGE)

RESEIGNEMENTS COMPLEMENTAIRES (A NE PAS TRANSMETTRE DANS LES MESSAGES SE PLAN DE VOL DEPOSE)

EMERGENCY RADIO / RADIO DE SECOURS

HR. MIN. P/

PERSONS ON BOARD / PERSONNES A BORD

SURVIVAL EQUIPMENT / EQUIPEMENT DE SURVIE

POLAR DESERT MOUNTAIN JUNGLE

S / P / S /

DINHIERS / CANOTS

NUMBER CAPACITY COVER

D / D /

AIRCRAFT COLOUR AND MARKINGS / COULEUR ET MARQUES DE L'AERONEF

A /

REMARKS / REMARQUES

N /

PILOT-IN-COMMAND / PILOTE COMMANDANT DE BORD

C /

SPACE RESERVED FOR ADDITIONAL REQUIREMENTS / ESPACE RESERVE A DES FINS SUPPLEMENTAIRES

FILED BY / DEPOSE PAR

ICAO Flight Plan Form Completion – Items 7-19

Complete all ICAO flight plans prior to departure. Although the ICAO flight plan form is printed in numerous languages, the format is always the same.

Always enter cruising speed and cruising level as a group. In the body of the flight plan form, if one item changes, the other item must be re-entered to keep speed and level a matched pair.

Always enter latitude and longitude as 7 or 11 characters. If entering minutes of one, enter minutes of the other as well, even if zeros.

Significant points should not be more than one hour apart.

Consider entering overflight/landing permissions after RMK/ in Item 18.

Item 7: Aircraft Identification (7 characters maximum)

Insert (A) the aircraft registration marking or (B) aircraft operating agency ICAO designator followed by the flight identification.

A. Insert only the aircraft registration marking (e.g., EIAKO, 4XBCD, N2567GA) if one of the following is true:

- the aircraft's radiotelephony call sign consists of the aircraft registration marking alone (e.g., OOTEK)
- the registration marking is preceded by the ICAO telephone designator for the aircraft operating agency (e.g., SABENA OOTEK)
- the aircraft is not equipped with radio.

CAE SimuFlite

B. Insert the ICAO designator for the aircraft operating agency followed by the flight identification (e.g., KL511, WT214, K7123, JH25) if the aircraft's radiotelephony call sign consists of the ICAO telephony designator for the operating agency followed by the flight identification (e.g., KLM 511, NIGERIA 213, KILO UNIFORM 123, JULIETT HOTEL 25).

Item 8: Flight Rules and Type of Flight (1 or 2 characters)

Flight Rules: Insert one of the following letters to denote the intended flight rules category:

- I** if IFR
- V** if VFR
- Y** if IFR first*
- Z** if VFR first*

*Note: Specify in Item 15 (Route) the point(s) where a flight rules change is planned.

Type of Flight: Insert one of the following letters to denote the type of flight when so required by the appropriate ATS authority:

- S** if scheduled air service
- N** if non-scheduled air transport operation
- G** if general aviation
- M** if military
- X** if other than the above

Item 9: Number (1 or 2 characters) and Type of Aircraft (2 to 4 characters) and Wake Turbulence Category (1 character)

Number of Aircraft: Insert number of aircraft if more than one.

Type of Aircraft: Insert the appropriate designator as specified in ICAO Doc 8643, Aircraft Type Designators. If no such designator has been assigned, or in case of formation flight comprising more than one aircraft type, insert ZZZZ, then specify in Item 18 the number(s) and type(s) of aircraft, preceded by TYP/.

Wake Turbulence Category: Insert / + H, M, or L:

- /H** Heavy – maximum certificated T/O mass of 136,000 kg (300,000 lbs) or more
- /M** Medium – maximum certificated T/O mass of less than 136,000 kg but more than 7,000 kg (between 15,500 and 300,000 lbs)
- /L** Light – maximum certificated T/O mass of 7,000 kg or less (15,500 lbs)

Item 10: Equipment

Radio Communication, Navigation, and Approach Aid Equipment: Insert one of the following letters:

- N** if COM/NAV/approach aid equipment is not carried or is inoperative.
- S** if standard COM/NAV/approach aid equipment (VHF RTF, ADF, VOR, ILS, or equipment prescribed by ATS authority) is on board and operative;

and/or insert one of the following letters to indicate corresponding COMM/NAV/approach aid equipment is available and operative:

- | | |
|--------------------------|-------------------------------------|
| A not allocated | O VOR |
| B not allocated | P not allocated |
| C LORAN C | Q not allocated |
| D DME | R RNP type certification |
| E not allocated | |
| F ADF | T TACAN |
| G (GNSS) | U UHF RTF |
| H HF RTF | V VHF RTF |
| I Inertial Navig. | W when prescribed by ATS |
| J (Data Link) | X when prescribed by ATS |
| K (MLS) | Y when prescribed by ATS |
| L ILS | Z Other (specify in Item 18) |
| M Omega | |

CAE SimuFlite

SSR Equipment: Insert one of the following letters to describe the operative SSR equipment on board:

- N** None
- A** Transponder Mode A (4 digits- 4 096 codes)
- C** Transponder Mode A and Mode C
- X** Transponder Mode S without aircraft ID or pressure-altitude transmission
- P** Transponder Mode S with pressure altitude transmission, but without aircraft ID transmission
- I** Transponder Mode S with aircraft ID transmission, but without pressure-altitude transmission
- S** Transponder Mode S with both pressure altitude and aircraft ID transmission

Item 13: Departure Aerodrome (4 characters) and Time (4 characters)

Departure Aerodrome: Insert one of the following:

- ICAO four-letter location indicator of the departure aerodrome.
- If no location indicator assigned, insert ZZZZ, then specify in Item 18 the name of the aerodrome, preceded by DEP/.
- If flight plan submitted while in flight, insert AFIL, then specify in Item 18 the four-letter location indicator of the ATS unit from which supplementary flight plan data can be obtained, preceded by DEP/.

Time: Insert one of the following:

- for a flight plan submitted before departure: the estimated off-block time
- for a flight plan submitted while in flight: the actual or estimated time over the first point of the route to which the flight plan applies.

Item 15: Cruising Speed (5 characters), Cruising Level (5 characters), and Route

Cruising Speed: Insert the true air speed for the first or whole cruising portion of the flight in one of the following forms:

- Kilometers per hour: K + 4 figures (e.g., K0830)
- Knots: N + 4 figures (e.g., N0485)
- Mach number: M + 3 figures (e.g., M082) if prescribed by ATS.

Cruising Level: Insert the planned cruising level for the first or whole portion of the planned route using one of the following forms:

- Flight level: F + 3 figures (e.g., F085; F330)
- Standard metric level in tens of metres: S + 4 figures (e.g., S1130) if prescribed by ATS.
- Altitude in hundreds of feet: A + 3 figures (e.g., A045; A100)
- Altitude in tens of metres: M + 4 figures (e.g., M0840)
- For uncontrolled VFR flights: VFR

Route: Include changes of speed, level, and/or flight rules.

For flights along designated ATS routes:

- If the departure aerodrome is on or connected to the ATS route, insert the designator of the first ATS route.
- If the departure aerodrome is not on or connected to the ATS route, insert the letters DCT followed by the point of joining the first ATS route, followed by the designator of the ATS route.
- Insert each point at which a change of speed, change of level, change of ATS route, and/or a change of flight rules is planned. For a transition between lower and upper ATS routes oriented in the same direction, do not insert the point of transition.
- In each case, follow with the designator of the next ATS route segment even if it is the same as the previous one (or with DCT if the flight to the next point is outside a designated route), unless both points are defined by geographical coordinates.

CAE SimuFlite

Flights outside designated ATS routes:

- Insert points not normally more than 30 minutes flying time or 200 nautical miles apart, including each point at which a change of speed or level, a change of track, or a change of flight rules is planned.
- When required by ATS, define the track of flights operating predominantly in an east-west direction between 70°N and 70°S by reference to significant points formed by the intersections of half or whole degrees of latitude with meridians spaced at intervals of 10 degrees of longitude. For flights operating in areas outside those latitudes, define the tracks by significant points formed by the intersection of parallels of latitude with meridians normally spaced not to exceed one hour's flight time. Establish additional significant points as deemed necessary.

For flights operating predominantly in a north-south direction, define tracks by reference to significant points formed by the intersection of whole degrees of longitude with specified parallels of latitude that are spaced at 5 degrees.

- Insert DCT between successive points unless both points are defined by geographical coordinates or bearing and distance.

Examples of Route Sub-entries

Enter a space between each sub-entry.

1. ATS route (2 to 7 characters): BCN1, B1, R14, KODAP2A
2. Significant point (2 to 11 characters): LN, MAY, HADDY
 - degrees only (7 characters – insert zeros, if necessary): 46N078W
 - degrees and minutes (11 characters – insert zeros if necessary): 4620N07805W
 - bearing and distance from navigation aid (NAV aid ID [2 to 3 characters] + bearing and distance from the NAV aid [6 characters – insert zeros if necessary]): a point 180 magnetic at a distance of 40 nautical miles from VOR “DUB” = DUB180040

3. Change of speed or level (max 21 characters):

insert point of change/cruising speed and level –
LN/N0284A045, MAY/N0305F180, HADDY/N0420F330,
DUB180040/M084F350

4. Change of flight rules (max 3 characters):

insert point of change (space) change to IFR or VFR –
LN VFR, LN/N0284A050 IFR

5. Cruise climb (max 28 characters):

insert C/point to start climb/climb speed / levels –
C/48N050W / M082F290F350
C/48N050W / M082F290PLUS
C/52N050W / M220F580F620

**Item 16: Destination Aerodrome (4 characters),
Total Estimated Elapsed Time (EET, 4 characters),
Alternate Aerodrome(s) (4 characters)**

Destination aerodrome: insert ICAO four-letter location indicator. If no indicator assigned, insert ZZZZ.

Total EET: insert accumulated estimated elapsed time. If no location indicator assigned, specify in Item 18 the name of the aerodrome, preceded by DEST/.

Alternate aerodrome(s): insert ICAO four-letter location indicator. If no indicator assigned to alternate, insert ZZZZ and specify in Item 18 the name of the alternate aerodrome, preceded by ALTN/.

CAE SimuFlite

Item 18: Other Information

This section may be used to record specific information as required by appropriate ATS authority or per regional air navigation agreements. Insert the appropriate indicator followed by an oblique stroke (/) and the necessary information. See examples below.

- Estimated elapsed time/significant points or FIR boundary designators: EET/CAP0745, XYZ0830.
- Revised destination aerodrome route details/ICAO aerodrome location indicator: RIF/DTA HEC KLAX. (Revised route subject to reclearance in flight.)
- Aircraft registration markings, if different from aircraft I.D. in Item 7: REG/N1234.
- SELCAL code: SEL/_____ .
- Operator's name, if not obvious from the aircraft I.D. in Item 7: OPR/_____ .
- Reason for special handling by ATS (e.g., hospital aircraft, one-engine inoperative): STS/HOSP, STS/ONE ENG INOP.
- As explained in Item 9: TYP/_____ .
- Aircraft performance data: PER/_____ .
- Communication equipment significant data: COM/UHF Only.
- Navigation equipment significant data: NAV/INS.
- As explained in Item 13: DEP/_____ .
- As explained in Item 16: DEST/_____ , or ALTN/_____ .
- Other remarks as required by ATS or deemed necessary: RMK/_____ .

Item 19: Supplementary Information

Endurance: insert fuel endurance in hours and minutes.

Persons on Board: insert total persons on board, including passengers and crew. If unknown at time of filing, insert TBN (to be notified).

Emergency Radio, Survival Equipment, Jackets, Dinghies: cross out letter indicators of all items not available; complete blanks as required for items available. (jackets: L = life jackets with lights, J = life jackets with fluorescein).

ICAO Position Reporting Format

Outside the U.S., position reports are required unless specifically waived by the controlling agency.

Initial Contact (Frequency Change)

1. Call sign
2. Flight level (if not level, report climbing to or descending to cleared altitude)
3. Estimating (next position) at (time) GMT

Position Report

1. Call sign
2. Position (if position in doubt, use phonetic identifier. For oceanic reports, first report the latitude, then the longitude (e.g., 50N 60W))
3. Time (GMT) or (UST)
4. Altitude or flight level (if not level, report climbing to or descending to altitude)
5. Next position
6. Estimated elapsed time (EET)

FAA Flight Plan Form

US DEPARTMENT OF TRANSPORTATION FLIGHT PLAN		(FAA USE) <input type="checkbox"/> PILOT BRIEFING <input type="checkbox"/> VNR		SPECIALIST INITIALS	
TIME		<input type="checkbox"/> STOPOVER		7. CRUISING ALTITUDE	
1. TYPE		3. AIRCRAFT TYPE/SPECIAL EQUIPMENT		6. DEPARTURE	
VFR		4. TRUE AIRSPEED		PROPOSED (Z)	
IFR		5. DEPARTURE POINT		ACTUAL (Z)	
DVFR		8. ROUTE OF FLIGHT			
9. DESTINATION (Name of airport and city)		10. EST TIME ENROUTE		11. REMARKS	
		HOURS		MINUTES	
12. FUEL ON BOARD		13. ALTERNATE		14. PILOTS NAME, ADDRESS & TELEPHONE NUMBER & AIRCRAFT HOME BASE	
HOURS		MINUTES		15. NUMBER ABOARD	
18. COLOR OF AIRCRAFT		17. DESTINATION CONTACT / TELEPHONE (OPTIONAL)			
CIVIL AIRCRAFT PILOTS, FAR Part 91 requires you to file an IFR flight plan to operate under instrument flight rules in controlled airspace. Failure to file could result in civil penalty not to exceed \$1,000 for each violation (Section 90.1 of the Federal Aviation Act of 1956, as amended). Filing of a VFR flight plan is recommended as a good operating practice. See also Part 99 for requirements concerning DVFR flight plans.					
FAA Form 7233-1		CLOSE VFR FLIGHT PLAN WITH _____		FSS ON ARRIVAL _____	

FAA Flight Plan Form Completion Instructions

- Block 1** Check the type flight plan. Check both the VFR and IFR blocks if composite VFR/IFR.
- Block 2** Enter your complete aircraft identification, including the prefix "N," if applicable.

- Block 3** Enter the designator for the aircraft, or if unknown, the aircraft manufacturer's name.

When filing an IFR flight plan for a TCAS equipped aircraft, add the prefix T for TCAS.

Example: T/G4/R.

When filing an IFR flight plan for flight in an aircraft equipped with a radar beacon transponder, DME equipment, TACAN-only equipment or a combination of both, identify equipment capability by adding a suffix to the AIRCRAFT TYPE, preceded by a slant (/) as follows:

- /X** no transponder
- /T** transponder with no altitude encoding capability
- /U** transponder with altitude encoding capability
- /D** DME, but no transponder
- /B** DME and transponder, but no altitude encoding capability
- /A** DME and transponder with altitude encoding capability
- /M** TACAN only, but no transponder
- /N** TACAN only and transponder, but with no altitude encoding capability
- /P** TACAN only and transponder with altitude encoding capability
- /C** RNAV and transponder, but with no altitude encoding

CAE SimuFlite

- /R** RNAV and transponder with altitude encoding capability
- /W** RNAV but no transponder
- /G** Global Positioning System (GPS)/Global Navigation Satellite System (GNSS) equipped aircraft with oceanic, en route, terminal, and GPS approach capability.
- /E** Flight Management System (FMS) with barometric Vertical Navigation (VNAV), oceanic, en route, terminal, and approach capability. Equipment requirements are:
 - (a) Dual FMS which meets the specifications of AC25-15, Approval of Flight Management Systems in Transport Category Airplanes; AC20-129, Airworthiness Approval of Vertical Navigation (VNAV) Systems for use in the U.S. National Airspace System (NAS) and Alaska; AC20-130, Airworthiness Approval of Multi-Sensor Navigation Systems for use in the U.S. National Airspace System (NAS) and Alaska; or equivalent criteria as approved by Flight Standards.
 - (b) A flight director and autopilot control system capable of following the lateral and vertical FMS flight path.
 - (c) At least dual inertial reference units (IRUs).
 - (d) A database containing the waypoints and speed/altitude constraints for the route and/or procedure to be flown that is automatically loaded into the FMS flight plan.
 - (e) An electronic map.
- /F** A single FMS with barometric VNAV, en route, terminal, and approach capability that meets the equipment requirements of /E (a) above.

Flight Planning

- Block 4** Enter your true airspeed (TAS).
- Block 5** Enter the departure airport identifier code, or if code is unknown, the name of the airport.
- Block 6** Enter the proposed departure time in Coordinated Universal Time (UTC). If airborne, specify the actual or proposed departure time as appropriate.
- Block 7** Enter the appropriate IFR altitude (to assist the briefer in providing weather and wind information).
- Block 8** Define the route of flight by using NAVAID identifier codes, airways, jet routes, and waypoints.
- Block 9** Enter the destination airport identifier code, or if unknown, the airport name. Include the city name (or even the state name) if needed for clarity.
- Block 10** Enter estimated time enroute in hours and minutes.
- Block 11** Enter only those remarks pertinent to ATC or to the clarification of other flight plan information, such as the appropriate call sign associated with the designator filed in Block 2 or ADCUS.
- Block 12** Specify the fuel on board in hours and minutes.
- Block 13** Specify an alternate airport, if desired or required.
- Block 14** Enter the complete name, address, and telephone number of the pilot in command. Enter sufficient information to identify home base, airport, or operator. This information is essential for search and rescue operations.
- Block 15** Enter total number of persons on board (POB), including crew.
- Block 16** Enter the aircraft's predominant colors.

CAE SimuFlite

Block 17 Record the FSS name for closing the flight plan. If the flight plan is closed with a different FSS or facility, state the recorded FSS name that would normally have closed your flight plan. Information transmitted to the destination FSS consists only of that in Blocks 3, 9, and 10. Estimated time enroute (ETE) will be converted to the correct estimated time of arrival (ETA).

Optional Record a destination telephone number to assist search and rescue contact should you fail to report or cancel your flight plan within $\frac{1}{2}$ hour after your estimated time of arrival (ETA).

ICAO Weather Format

On July 1, 1993, the worldwide (ICAO) and North American aerodrome weather codes merged into a new international code for forecasts and reports. The new codes are the result of an effort to meet revised aeronautical requirements and reduce confusion in the aviation community.

The United States converted to METAR/TAF format on July 1, 1996 with terminal aerodrome forecast (TAF) replacing the terminal forecast airport and meteorological aviation routine weather report (METAR) replacing the airport surface observation (AOS).

Although the aviation community now uses a standard set of codes, some differences remain between U.S. and ICAO codes. For example, the following differences may remain in effect:

- Horizontal visibility is reported in statute miles (SM) in the U.S. code and in meters in the ICAO code. To avoid confusion, the suffix SM follows the visibility value if it is reported in U.S. code. Additionally, when forecast visibility in the U.S. exceeds six statute miles, the prefix P appears (e.g., P6SM - a visibility forecast greater than six statute miles).
- Runway visual range (RVR) is reported in feet (FT) in the U.S. code and in meters in ICAO code. When RVR is reported for a U.S. runway, the suffix FT is added (e.g., R27L/2700FT, runway 27 left RVR 2,700 ft). RVR is reported only in actual weather, not a forecast TAF.
- Ceiling and visibility okay (CAVOK) is not used in the U.S.
- Temperature, turbulence, and icing conditions are not forecast in a U.S. TAF. Turbulence and icing are forecast in Area Forecasts (FAS). Surface temperatures are forecast only in public service and agricultural forecasts.
- Trend forecasts are not included in U.S. METARs.

CAE SimuFlite

- An altimeter setting in a U.S. METAR is in inches of mercury. In an ICAO METAR, it is in hectopascals (millibars). To avoid confusion, a prefix is always assigned: an A for a U.S. report or a Q for an ICAO report (e.g., A2992 or Q1013).
- In the U.S., remarks (RMKs) precede recent (RE) weather and wind shear (WS) information reported at the end of METARs.
- Low level windshear, not associated with convective activity, will appear in U.S., Canadian, and Mexican TAFs.

Sample TAF

A terminal aerodrome forecast (TAF) describes the forecast prevailing conditions at an airport and covers either a 9-hour period or a 24-hour period. Nine-hour TAFs are issued every three hours; 24-hour TAFs are issued every six hours. Amendments (AMD) are issued as necessary. A newly issued TAF automatically amends and updates previous versions. Also, many foreign countries issue eighteen hour TAFs at six hour intervals.

The following example has detailed explanations of the new codes:

**KHPN 091720Z 091818 22020KT 3/4SM -SHRA
BKN020CB FM2030 30015G25KT 1500 SHRA
OVC015CB PROB40 2022 1/4SM TSRA OVC008CB
FM2300 27008KT 1 1/2SM -SHRA BKN020
OVC040 TEMPO 0407 00000KT 1/2SM -RABR
VV004 FM1000 22010KT 1/2SM -SHRA OVC020
BECMG 1315 20010KT P6SM NSW SKC**

KHPN. ICAO location indicator. The usual 3 letter identifiers we are familiar with are now preceded by a K for the contiguous United States. Alaska and Hawaii will use 4 letter identifiers with PA and PH respectively. Changes are planned to incorporate alphabetic identifiers for those weather reporting stations where numbers and letters are now used (e.g., W10 changed to KHEF).

091720Z. Issuance time. The first two digits (**09**) indicate the date; the following four digits (**1720**) indicate time of day. All times are in UTC or Zulu.

091818. Valid period. The first two digits (**09**) indicate the date. The second two digits (**18**) are the hour that the forecast period begins. The last two digits (**18**) indicate the hour that the forecast expires. The example is a 24-hour forecast.

CAE SimuFlite

22020KT. Surface wind. The first three digits (**220**) are true direction to the nearest 10°. The next two digits (**20**) indicate speed. **KT** indicates the scale is in knots. TAFs may also use kilometers-per-hour (**KMH**) or meters per second (**MPS**). If gusts are forecast, a **G** and a two-digit maximum gust speed follow the five-digit wind reading (e.g., **22020G10KT**). Five zeros and the appropriate suffix indicate calm winds (e.g., **00000KT/KMH/MPS**).

NOTE: Towers, ATIS and airport advisory service report wind direction as magnetic.

3/4SM. Prevailing horizontal visibility. Visibility (**3/4SM**) is in statute miles in the U.S. However, most countries use meters which appears with no suffix (e.g., **1200**).

-SHRA. Weather and/or obstruction to visibility. The minus sign (-) indicates light, a plus sign (+) indicates heavy, and no prefix indicates moderate. If no significant weather is expected, the group is omitted. If the weather ceases to be significant after a change group, the weather code is replaced by the code for no significant weather (**NSW**).

BKN020CB. Cloud coverage/height/type. The first three letters indicate expected cloud coverage. Cloud height is indicated by the second set of three digits; these are read in hundreds of feet (or multiples of 30 meters). When cumulonimbus is forecast, cloud type (**CB**) follows cloud height.

When an obscured sky is expected and information on vertical visibility is available, the cloud group is replaced by a different five-digit code (e.g., **VV004**). The first two digits are Vs. The three figures following indicate vertical visibility in units of 100 ft. For indefinite vertical visibility, the two Vs would be followed by two slash marks (**VV//**).

NOTE: More than one cloud layer may be reported.

FM2030. Significant change expected in prevailing weather. The from code (**FM**) is followed by a four-digit time code (**2030**). Prevailing weather conditions consist of a surface wind, visibility, weather, and cloud coverage.

PROB40 2022. Probability (**PROB**) and a two-digit code for percent (**40**) is followed by a four-digit code (**2022**) that indicates a beginning time (**20**) and an ending time (**22**) to the nearest whole hour for probable weather conditions. Only 30% and 40% probabilities are used; less than these are not sufficient to forecast; 50% and above support the normal forecast.

TEMPO. Temporary change followed by a four-digit time. Forecasts temporary weather conditions. Indicates that changes lasting less than an hour and a half may occur anytime between the two-digit beginning time and two-digit ending time.

CAE SimuFlite

Decoding TAFs

The latter half of the sample TAF is decoded based on the preceding information.

30015G25KT 1/2SM SHRA OVC015CB

- Surface winds, 300° true direction
- Mean speed, 15 kts
- Gusts, maximum gust 25 kts
- Visibility, 1/2 statute mile
- Moderate showers of rain
- Overcast at 1,500 ft with cumulonimbus clouds

FM2300 27008KT 1 1/2SM -SHRA BKN020 OVC040

- Significant change expected from 2300 hours
- Surface winds, 270° true direction at 8 kts
- Visibility, one and one-half statute mile
- Light showers of rain
- Broken clouds at 2,000 ft with a second overcast layer at 4,000 ft

TEMPO 0407 00000KT 1/4SM -RA BR VV004

- Temporary between 0400 and 0700 hours
- Calm winds
- Visibility 1/4 statute mile
- Light rain and mist
- Indefinite ceiling, vertical visibility 400 ft

FM1000 22010KT 1/2SM -SHRA OVC020

- Significant change expected from 1000 hours
- Surface winds, 220° true direction at 10 kts
- Visibility, 1/2 statute mile
- Light showers of rain
- Overcast skies at 2,000 ft

BECMG 1315 20010KT P6SM NSW SKC

- Change to the forecast conditions between 1300 and 1500 hours
- Expected surface winds, 200° true direction at 10 kts
- Visibility, more than 6 statute miles
- No significant weather
- Clear skies

CAE SimuFlite

Sample METAR

A routine aviation weather report on observed weather, or METAR, is issued at hourly or half-hourly intervals. A special weather report on observed weather, or SPECI, is issued when certain criteria are met. Both METAR and SPECI use the same codes.

A forecast highly likely to occur, or TREND, covers a period of two hours from the time of the observation. A TREND forecast indicates significant changes in respect to one or more of the following elements: surface wind, visibility, weather, or clouds. TREND forecasts use many of the same codes as TAFs.

Most foreign countries may append a TREND to a METAR or SPECI. In the U.S., however, a TREND is not included in a METAR or SPECI.

The following example indicates how to read a METAR:

**KHPN 201955Z 22015G25KT 2SM
R22L/1000FT TSRA OVC010CB 18/16 A2990
RERAB25 BECMG 2200 24035G55**

KHPN. ICAO location indicator.

201955Z. Date and time of issuance. METARs are issued hourly.

22015G25KT. Surface wind (same as TAF). If the first three digits are VAR, the wind is variable with wind speed following. If direction varies 60° or more during the ten minutes immediately preceding the observation, the two extreme directions are indicated with the letter V inserted between them (e.g., **280V350**).

NOTE: G must vary 10 kts or greater to report gust.

2SM. Prevailing horizontal visibility in statute miles. In the U.S., issued in statute miles with the appropriate suffix (**SM**) appended. When a marked directional variation exists, the reported minimum visibility is followed by one of the eight compass points to indicate the direction (e.g., **2SMNE**).

R22L/1000FT. The runway visual range group. The letter **R** begins the group and is followed by the runway description (**22L**). The range in feet follows the slant bar (**1000FT**). In other countries range is in meters and no suffix is used.

TSRA OVC010CB. Thunderstorms (**TS**) and rain (**RA**) with an overcast layer at 1,000 ft and cumulonimbus clouds.

NOTE: More than one cloud layer may be reported.

18/16. Temperatures in degrees Celsius. The first two digits (**18**) are observed air temperature; the last two digits (**16**) are dew point temperature. A temperature below zero is reported with a minus (**M**) prefix code (e.g., **M06**).

A2990. Altimeter setting. In the U.S., **A** is followed by inches and hundredths; in most other countries, **Q** is followed by hectopascals (i.e., millibars).

RERAB25. Recent operationally significant condition. A two letter code for recent (**RE**) is followed by a two letter code for the condition (e.g., **RA** for rain). A code for beginning or ending (**B** or **E**) and a two-digit time in minutes during the previous hour. When local circumstances also warrant, wind shear may also be indicated (e.g., **WS LDG RWY 22**).

NOTE: A remark (RMK) code is used in the U.S. to precede supplementary data of recent operationally significant weather.

NOTE: RMK [SLP 013] breaks down SEA LVL press to nearest tenth (e.g., 1001.3 reported as SLP 013).

CAE SimuFlite

BECMG AT 2200 24035G55. A TREND forecast. The becoming code (**BECMG**) is followed by a when sequence (**AT 2200**) and the expected change (e.g., surface winds at 240° true at 35 kts with gusts up to 55 kts).

NOTE: For more information on METAR/TAF, consult the FAA brochure “New Aviation Weather Format METAR/TAF.” Copies may be obtained by writing to: FAA/ASY-20, 400 7th Street, S.W. Washington, DC 20590.

Appendix A: Fuel Burn

No Tail Tank Fuel

6.8 LBS/U.S. GALLON

US Gallons TOTAL Main + Aux	Weight (Lbs) TOTAL Main + Aux	ARM Main & Aux	Moment/1000 TOTAL Main + Aux
2,454	16,686 9,818 + 6,868	485.6 506.6 & 455.6	8,103 4,974 + 3,129
2,403	16,343 9,475 + 6,868	484.5 505.4 & 455.6	7,918 4,789 + 3,129
2,353 1,343 + 1,010	16,000 9,132 + 6,868	483.1 503.8 & 455.6	7,730 4,601 + 3,129
2,304 1,343 + 961	15,666.8 9,132 + 6,534.8	484 503.8 & 456.1	7,582 4,601 + 2,981
2,244 1,343 + 901	15,258.8 9,132 + 6,126.8	485 503.8 & 456.8	7,400 4,601 + 2,799
2,184 1,343 + 841	14,850.8 9,132 + 5,718.8	486 503.8 & 457.6	7,218 4,601 + 2,617
2,124 1,343 + 781	14,442.8 9,132 + 5,310.8	487 503.8 & 458.1	7,034 4,601 + 2,433
2,064 1,343 + 721	14,034.8 9,132 + 4,902.8	488 503.8 & 458.6	6,849 4,601 + 2,248
2,004 1,343 + 661	13,626.8 9,132 + 4,494.8	489 503.8 & 458.9	6,664 4,601 + 2,063
1,943 1,343 + 600	13,212 9,132 + 4,080	490 503.8 & 459	6,474 4,601 + 1,873
1,883 1,343 + 540	12,804 9,132 + 3,672	491 503.8 & 459.1	6,287 4,601 + 1,686
1,823 1,343 + 480	12,396 9,132 + 3,264	492 503.8 & 459	6,099 4,601 + 1,498
1,763 1,343 + 420	11,988 9,132 + 2,856	493.1 503.8 & 458.7	5,911 4,601 + 1,310
1,703 1,343 + 360	11,580 9,132 + 2,448	494.3 503.8 & 458.6	5,724 4,601 + 1,123
1,643 1,343 + 300	11,172 9,132 + 2,040	495.7 503.8 & 459.2	5,538 4,601 + 937

CAE SimuFlite

Appendix A: Fuel Burn (cont.)

6.8 LBS/U.S. GALLON

US Gallons TOTAL Main + Aux	Weight (Lbs) TOTAL Main + Aux	ARM Main & Aux	Moment/1000 TOTAL Main + Aux
1,583 1,343 + 240	10,764 9,132 + 1,632	497.3 503.8 & 460.9	5,353 4,601 + 752
1,523 1,343 + 180	10,356 9,132 + 1,224	498.7 503.8 & 460.6	5,165 4,601 + 564
1,463 1,343 + 120	9,948 9,132 + 816	500.2 503.8 & 459.5	4,976 4,601 + 375
1,403 1,343 + 60	9,540 9,132 + 408	501.8 503.8 & 456.1	4,787 4,601 + 186
1,343 9,132 + 0	9,132 9,132 + 0	503.8 503.8 & 0	4,601 4,601 + 0
1,321 8,982.8 + 0	8,982.8 8,982.8 + 0	503.2 503.2 & 0	4,520 4,520 + 0
1,261 8,574.8 + 0	8,574.8 8,574.8 + 0	502.1 502.1 & 0	4,305 4,305 + 0
1,201 8,166.8 + 0	8,166.8 8,166.8 + 0	500.9 500.9 & 0	4,901 4,901 + 0
1,141 7,758.8 + 0	7,758.8 7,758.8 + 0	499.6 499.6 & 0	3,876 3,876 + 0
1,081 7,350.8 + 0	7,350.8 7,350.8 + 0	498.5 498.5 & 0	3,664 3,664 + 0
1,021 6,942.8 + 0	6,942.8 6,942.8 + 0	497.2 497.2 & 0	3,452 3,452 + 0
1,010 6,868 + 0	6,868 6,868 + 0	497.1 497.1 & 0	3,414 3,414 + 0
961 6,534.8 + 0	6,534.8 6,534.8 + 0	496 496 & 0	3,241 3,241 + 0
901 6,126.8 + 0	6,126.8 6,126.8 + 0	494.9 494.9 & 0	3,032 3,032 + 0
841 5,718.8 + 0	5,718.8 5,718.8 + 0	493.7 493.7 & 0	2,823 2,823 + 0

Appendix A: Fuel Burn (cont.)

6.8 LBS/U.S. GALLON

US Gallons TOTAL Main + Aux	Weight (Lbs) TOTAL Main + Aux	ARM Main & Aux	Moment/1000 TOTAL Main + Aux
781	5,310.8 5,310.8 + 0	492.4 492.4 & 0	2,615 2,615 + 0
721	4,902.8 4,902.8 + 0	491.1 491.1 & 0	2,408 2,408 + 0
661	4,494.8 4,494.8 + 0	489.7 489.7 & 0	2,201 2,201 + 0
600	4,080 4,080 + 0	488.3 488.3 & 0	1,992 1,992 + 0
540	3,672 3,672 + 0	486.9 486.9 & 0	1,788 1,788 + 0
480	3,264 3,264 + 0	485.5 485.5 & 0	1,585 1,585 + 0
420	2,856 2,856 + 0	484.2 484.2 & 0	1,383 1,383 + 0
360	2,448 2,448 + 0	482.8 482.8 & 0	1,182 1,182 + 0
300	2,040 2,040 + 0	481.5 481.5 & 0	982 982 + 0
240	1,632 1,632 + 0	480 480 & 0	783 783 + 0
180	1,224 1,224 + 0	478.5 478.5 & 0	586 586 + 0
120	816 816 + 0	476.6 476.6 & 0	389 389 + 0
60	408 408 + 0	474 474 & 0	193 193 + 0

CAE SimuFlite

Appendix B: Fuel Burn With Tail Tank Fuel 6.8 LBS/U.S. GALLON

US Gallons TOTAL Int + Tail	Weight (Lbs) TOTAL Int + Tail	ARM Int & Tail	Moment/1000 TOTAL Int + Tail
2,642 2,454 + 188	17,962¹ 16,686 + 1,276	509.1 485.6 & 816.7	9,145 8,103 + 1,042.1
2,629 2,454 + 175	17,876 16,686 + 1,190	507.6 485.6 & 816	9,074 8,103 + 971
2,604 2,454 + 150	17,502 16,686 + 816	500.9 485.6 & 814.4	8,768 8,103 + 664.6
2,579 2,454 + 125	17,536 16,686 + 850	501.5 485.6 & 812.7	8,794 8,103 + 690.8
2,554 2,454 + 100	17,366 16,686 + 680	498.3 485.6 & 810.8	8,654 8,103 + 551.3
2,529 2,454 + 75	17,196 16,686 + 510	495.2 485.6 & 808.6	8,515 8,103 + 412.4
2,504 2,454 + 50	17,026 16,686 + 340	498.9 485.6 & 805.5	8,494 8,103 + 391.2
2,479 2,454 + 25	16,856 16,686 + 170	488.8 485.6 & 801	8,239 8,103 + 136.2
2,454	16,686 16,686 + 0	485.6 485.6 & 0	8,103 8,103 + 0

¹Maximum Fuel Weight Allowed

CAE SimuFlite

Appendix C: Fuel Burn With Tail Tank Fuel 6.7 LBS/U.S. GALLON

US Gallons TOTAL Int + Tail	Weight (Lbs) TOTAL Int + Tail	ARM Int & Tail	Moment/1000 TOTAL Int + Tail
2,642	17,962¹ 16,686 + 1,276	509.1 485.6 & 816.7	9,145 8,103 + 1,042.1
2,591 2,403 + 188	17,619 16,343 + 1,276	508.5 484.5 & 816.7	8,960 7,918 + 1042.1
2,541 2,353 + 188	17,276 16,000 + 1,276	507.8 483.1 & 816.7	8,772 7,730 + 1042.1
2,528 2,353 + 175	17,190 16,000 + 1,190	506.2 483.1 & 816	8,701 7,730 + 971
2,503 2,353 + 150	17,020 16,000 + 1,020	503 483.1 & 814.4	8,561 7,730 + 830.7
2,478 2,353 + 125	16,850 16,000 + 850	499.8 483.1 & 812.7	8,421 7,730 + 690.8
2,453 2,353 + 100	16,680 16,000 + 680	496.5 483.1 & 810.8	8,281 7,730 + 551.3
2,428 2,353 + 75	16,510 16,000 + 510	493.2 483.1 & 808.6	8,142 7,730 + 412.4
2,403 2,353 + 50	16,340 16,000 + 340	489.8 483.1 + 805.5	8,004 7,730 + 273.9
2,378 2,353 + 25	16,170 16,000 + 170	486.5 483.1 & 801	7,866 7,730 + 136.2

¹Maximum Fuel Weight Allowed

CAE SimuFlite
